


RG-11 RG11 Coaxial Cable with Messenger Shield 95%

Model : HD1195BVM

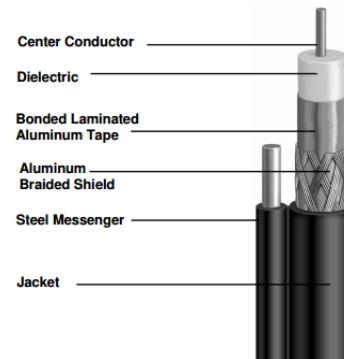

Product Description:

Product Discription:	Bonded laminated tape, 90% braid, laminated aluminium tape, PVC jacket, 0.072" messenger
Center Conduptr:	18 AWG copper-clad steel nominal diameter 0.064" (1.63 mm)
Dielectric:	Foam PE diameter over dielectric 7.11 mm
Shield:	1 ST Shield : Lanminated aluminium tape bonded to the dielectric nominal diameter over over tape : 0.28" (7.29 mm)
Jacket:	PVC nominal diameter over jacket : 0.272" (6.19 mm) nominal jacket thickness : 0.30" (0.76 mm)
Electrical Properties:	Normal impedance 75 ohm +/-3 ohm Velocity of propagation 85% normal
Messenger:	Nirminal diameter of messenger : 0.051" (1.30 mm)

Specification:

@Frequency (MHz)	Loss (dB)/100 Meter	Loss (dB)/100 ft.
5	1.25	0.38
55	3.15	0.96
83	3.87	1.18
187	5.74	1.75
211	6.23	1.90
250	6.72	2.05
300	7.38	2.25
350	7.94	2.42
400	8.53	2.60
450	9.02	2.75
500	9.51	2.90
550	9.97	3.04
600	10.43	3.18
750	11.97	3.65
865	13.05	3.98
1000	14.27	4.35