


## Taps with F connectors 5-2400MHz

### TAPS616

SKU : AA0706AEX0801

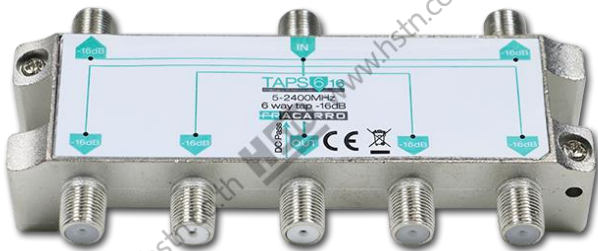

**Tapoff 6 Way (tap loss 16 dB)** on frequency range 5-2400MHz with “top down” F connectors.

**Compact** and good-looking design to fulfill every installation requirement and enable them to be installed in every location.

**Zinc die cast housing** allows to reach the best performances over all the operating frequency range, with low insertion loss up to high frequencies and high isolation between outputs.

DC pass is allowed between the loop through output and input

### Main Specifications

- Low insertion loss also on SAT band, up to 2400MHz.
- Changeless attenuation on tap ports from 5 to 2400MHz.
- DC pass from loop-through output to input
- High separation between outputs
- “A” shielding factor
- 2 earth screws
- Wall fixing

Fracarro Code	Item	Product dimensions mm	Packing	EAN Code	Quantity Pc	Packaging dimensions mm	Net weight kg	Weight kg
287319	TAPS616	100x60x25	Single	8016978095018	1	126x64x27	0.146	0.15

### 6 WAYS TAPS

Item	Code	Insertion loss					Tap loss 40 ÷ 2400 MHz	Separation out-taps				
		40 MHz	862 MHz	950 MHz	2150 MHz	2400 MHz		40 MHz	862 MHz	950 MHz	2150 MHz	2400 MHz
		dB	dB	dB	dB	dB		dB	dB	dB	dB	dB
TAPS616	287319	4	4.5	5	5.5	7	16	25	25	24	22	21